# E-Stacker Mono Initial





#### Perfect for double pallet handling, slopes and uneven surfaces

Initial lift support legs can be used as a second set of forks to transport 2 pallets at a time Support legs can be raised by 115mm: gives extra clearance on ramps, slopes and uneven surfaces Large 1200kg capacity (forks & support legs combined) Compact mono-mast design for excellent operator visibility Programmable controller, electro-magnetic brake On board hour meter, charger & battery discharge indicator

## E-Stacker Mono Initial:

#### Specification




Model:Mono Initial 1.2Lift Type:Fully PoweredLoad Capacity (Q):1200kgLoad Catance (c)600kmLoad Distance (centre of drive axle to fork (x)805mmWheelbase (y)1260mmService Weight (ind battery)600kgAxle loading, laden driving side/loading side560/1160kgAxle loading, unladen driving side/loading side350/170kgWheelsPolyurethaneHeight, mast lowered (h1)1940mmLift Height (h3 + h13)1608mnFork height, lowered (h13)115mmFork height, lowered (h14)750mmFork height, lowered (h13)1750mmLength to face of forks (I2)600mmOverall length (11)750mmLength to face of forks (I2)60mmOverall length (b1)96mmFork Admensions (s/e/)560mmAkle width, 1000 x 1200 UK pallet crossways (Ast)240mmAlse width, 1000 x 1200 UK pallet crossways (Ast)240mmAlse width, 1000 x 1200 UK pallet crossways (Ast)250mmTarvel Speed, with load/without load0.10/0.07 m/sLifting Speed, with load/without load0.10/0.07 m/sLifting Speed, with load/without load0.10/0.07 m/sService BrakeElectromagneticDrive Motor rating S260 min0.55 kWLift Motor rating S260 min0.55 kW <th></th> <th></th>		
AddConstructionLoad Capacity (Q):600mmLoad Chrte Distance (c)600mmLoad Distance, centre of drive axle to fork (x)805mmWheelbase (y)1260mmService Weight (incl battery)600kgAxle loading, laden driving side/loading side560/1160kgAxle loading, unladen driving side/loading side350/170kgWheelsPolyurethaneHeight, mast lowered (h1)1608mmLift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (l1)750mmUerall length (l2)600mmOverall width (b1)790mmFork dae of forks (l2)600mmOverall width (b1)98mmFork Josen (s/g/)500mmFork Josen (s/g/)240mmI forger (m2)240mmAsle width, 1000 x 1200 UK pallet crossways (Ast)240mmAsle width, 1000 x 1200 UK pallet crossways (Ast)250mmTarvel Speed, with load/without load10001mTarvel Speed, with load/without load10100.17 m/sLuwering Speed, with load/without load3/10%Service BrakeElectromagneticDrive Mater rating S260 min65 kWLift Moter rating S260 min65 kWLift Moter rating S260 min65 kWLift Moter Rating S1, 15%22 kWLift Moter Rating S2, 15%22 kWLift Moter Rating S2, 15%22 kW	Model:	Mono Initial 1.2
Load Centre Distance (c)600mmLoad Distance, centre of drive axle to fork (x)805mmWheelbase (y)1260mmService Weight (incl battery)600kgAxle loading, laden driving side/loading side560/1160kgAxle loading, unladen driving side/loading side350/170kgWheelsPolyurethaneHeight, mast lowered (h1)1940mmLift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)185mmInitial Lift (h5)115mmOverall length (11)1750mmLength to face of forks (12)600mmOverall width (b1)796mmFork Span (b5)560mmGround Clearance (m2)600mmAisle width, 1000 x 1200 Uk pallet crossways (Ast)240mmAisle width, 1000 x 1200 Uk pallet crossways (Ast)150mmTurning radius (Wa)1500mmTavel Speed, with load/without load101/0.14 m/sLifting Speed, with load/without load101/0.27 m/sLowering Speed, with load/without load310%Service BrakeElectromagneticDrive Motor rating 22 60 min655 kWLift Motor Rating at 5, 15%22 kWLift Motor Rating at 5, 15%22 kW	Lift Type:	Fully Powered
Load Distance, centre of drive axle to fork (x)805mmWheelbase (y)1260mmService Weight (incl battery)600kgAxle loading, laden driving side/loading side560/1160kgAxle loading, unladen driving side/loading side350/170kgWheelsPolyurethaneHeight, mast lowered (h1)1940mmLift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (l1)750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork height, 1000 × 1200 UK pallet crossways (Ast)600mmAisle width, 1000 × 1200 UK pallet crossways (Ast)240mmAisle width, 1000 × 1200 UK pallet crossways (Ast)250mmTurning radius (Wa)1500mmTravel Speed, with load/without load1010.14 m/sLifting Speed, with load/without load0.100.07 m/sAximum gradeability, with load/without load310%Service BrakeElectromagneticDrive Motor rating 52 60 min6.65 kWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (5h)2.12 kSV/Ah	Load Capacity (Q):	1200kg
Wheelbase (y)1260mmService Weight (ind battery)600kgAxle loading, laden driving side/loading side560/1160kgAxle loading, unladen driving side/loading side350/170kgWheelsPolyurethaneHeight, mast lowered (h1)1940mmLift Height (h3 + h13)1608mmHeight, nast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (11)750mmLength to face of forks (12)600mmOverall width (b1)796mmFork height, 1000 x 1200 UK pallet crossways (Ast)60190/1150mmFork Span (b5)500mmGround Clearance (m2)260mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 1000 x 1200 UK pallet crossways (Ast)1500mmTarvel Speed, with load/without load0.10/0.14 m/sLifting Speed, with load/without load0.10/0.07 m/sAister ide Load/without load1.10/0.07 m/sLifting Speed, with load/without load2.2 kWLift Moor rating 52 60 min6.6 kWLift Moor rating 52 60 min6.6 kWLift Moor rating 52 60 min6.6 kWLift Moor rating 52 60 min2.2 kWLift Moor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (5b)2.12/SV/Ah	Load Centre Distance (c)	600mm
Service Weigh (ind battery)600kgAxle loading, laden driving side/loading side560/1160kgAxle loading, unladen driving side/loading side350/170kgWheelsPolyurethaneHeight, mast lowered (h1)1940mmLift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (11)1750mmLength to face of forks (12)600mmOverall width (b1)796mmFork dimensions (s/c/l)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load0.10/0.14 m/sLifting Speed, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 52 60 min6.5 KWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (Sh)2.2 kUX	Load Distance, centre of drive axle to fork (x)	805mm
Axle loading, laden driving side/loading side560/1160kgAxle loading, unladen driving side/loading side350/170kgWheelsPolyurethaneHeight, mast lowered (h1)1940mmLift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (11)1750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork dimensions (s/e/l)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 1000 x 1200 UK pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load0.10/0.14 m/sLifting Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating s2 60 min0.65 kWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Wheelbase (y)	1260mm
Axle loading, unladen driving side/loading side350/170kgWheelsPolyurethaneHeight, mast lowered (h1)1940mmLift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (l1)1750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork height, 1000 x 1200 UK pallet crossways (Ast)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)260mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load0.10/0.14 m/sLifting Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load310%Service BrakeElectromagneticDrive Motor rating 32 50 min0.55 kWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (5h)2.2 kS V/Ah	Service Weight (incl battery)	600kg
WheelsPolyurethaneHeight, mast lowered (h1)1940mmLift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (l1)1750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork dimensions (s/c/l)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load0.10/0.14 m/sLifting Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeFlectromagneticDrive Motor rating 52 60 min0.55 KWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Axle loading, laden driving side/loading side	560/1160kg
Height, mast lowered (h1)1940mmLift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (l1)1750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork dimensions (s/e/l)60/190/1150mmFork dimensions (s/e/l)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)250mmTurning radius (Wa)1500mmLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 32 60 min0.55 kWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (Sh)2.12/85 V/Ah	Axle loading, unladen driving side/loading side	350/170kg
Lift Height (h3 + h13)1608mmHeight, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (11)750mmLength to face of forks (l2)600mmOverall width (b1)96mmFork dimensions (s/e/l)60/190/1150mmFork dimensions (s/e/l)560mmFork dimensions (s/e/l)260mmGround Clearance (m2)240mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (5h)2.12/85 V/Ah	Wheels	Polyurethane
Height, mast extended (h4)2011mmFork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (l1)1750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork dimensions (s/e/l)60/190/1150mmFork dimensions (s/e/l)500mmFork Span (b5)500mmGround Clearance (m2)24mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load0.10/0.14 m/sLifting Speed, with load/without load0.10/0.07 m/sService BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (5b)2.12/85 V/Ah	Height, mast lowered (h1)	1940mm
Fork height, lowered (h13)88mmInitial Lift (h5)115mmOverall length (l1)1750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork dimensions (s/e/l)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load0.10/0.14 m/sLifting Speed, with load/without load0.10/0.07 m/sService BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at 5, 15%2.2 kWBattery voltage/rated capacity (5b)2.12/85 V/Ah	Lift Height (h3 + h13)	1608mm
Initial Lift (h5)115mmOverall length (l1)1750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork dimensions (s/e/l)60/190/1150mmFork dimensions (s/e/l)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load0.10/0.14 m/sLifting Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at \$, 15%2.2 kWBattery voltage/rated capacity (5b)2x12/85 V/Ah	Height, mast extended (h4)	2011mm
Overall length (l1)1750mmLength to face of forks (l2)600mmOverall width (b1)796mmFork dimensions (s/e/l)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating S2 60 min0.65 kWLift Motor Rating at \$, 15%2.2 kwBattery voltage/rated capacity (5h)x12/85 V/Ah	Fork height, lowered (h13)	88mm
Length to face of forks (l2)600mmOverall width (b1)796mmFork dimensions (s/e/l)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x1/85 V/Ah	Initial Lift (h5)	115mm
Overall width (b1)796mmFork dimensions (s/e/l)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at S, 15%2.2 kW	Overall length (l1)	1750mm
Fork dimensions (s/e/l)60/190/1150mmFork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Length to face of forks (I2)	600mm
Fork Span (b5)560mmGround Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Drive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Overall width (b1)	796mm
Ground Clearance (m2)26mmAisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Fork dimensions (s/e/l)	60/190/1150mm
Aisle width, 1000 x 1200 UK pallet crossways (Ast)2340mmAisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Fork Span (b5)	560mm
Aisle width, 800 x 1200 Euro pallet lengthways (Ast)2260mmTurning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Ground Clearance (m2)	26mm
Turning radius (Wa)1500mmTravel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating 52 60 min0.65 kWLift Motor Rating at \$, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Aisle width, 1000 x 1200 UK pallet crossways (Ast)	2340mm
Travel Speed, with load/without load4.5/4.5kmhLifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Aisle width, 800 x 1200 Euro pallet lengthways (Ast)	2260mm
Lifting Speed, with load/without load0.10/0.14 m/sLowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)X12/85 V/Ah	Turning radius (Wa)	1500mm
Lowering Speed, with load/without load0.10/0.07 m/sMaximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Travel Speed, with load/without load	4.5/4.5kmh
Maximum gradeability, with load/without load3/10%Service BrakeElectromagneticDrive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Lifting Speed, with load/without load	0.10/0.14 m/s
Service BrakeElectromagneticDrive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Lowering Speed, with load/without load	0.10/0.07 m/s
Drive Motor rating S2 60 min0.65 kWLift Motor Rating at S, 15%2.2 kWBattery voltage/rated capacity (5h)2x12/85 V/Ah	Maximum gradeability, with load/without load	3/10%
Lift Motor Rating at S, 15% 2.2 kW   Battery voltage/rated capacity (5h) 2x12/85 V/Ah	Service Brake	Electromagnetic
Battery voltage/rated capacity (5h) 2x12/85 V/Ah	Drive Motor rating S2 60 min	0.65 kW
	Lift Motor Rating at S, 15%	2.2 kW
Sound level at operators ear 74 db	Battery voltage/rated capacity (5h)	2x12/85 V/Ah
	Sound level at operators ear	74 db

Units 10 & 11 Bridgwater Court, Oldmixon Crescent, Weston-super-Mare BS24 9AY


Tel: +44 (0)1934 621777 Email: sales@howardhandling.co.uk Web: www.howardhandling.co.uk

### E-Stacker Mono Initial:

Specification

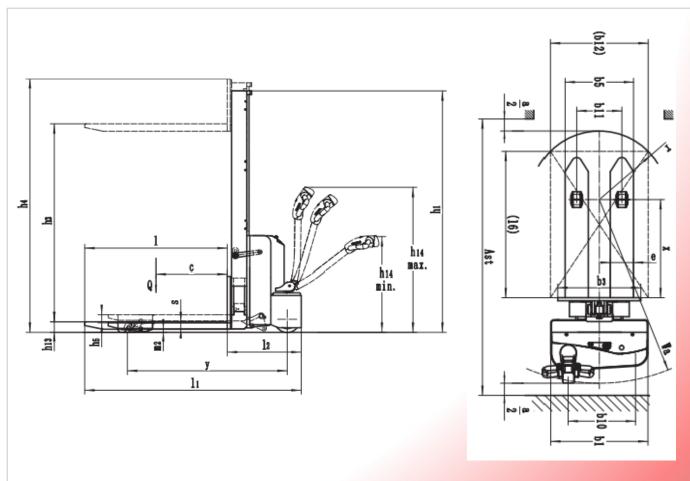

**Rated Capacities Graph** 

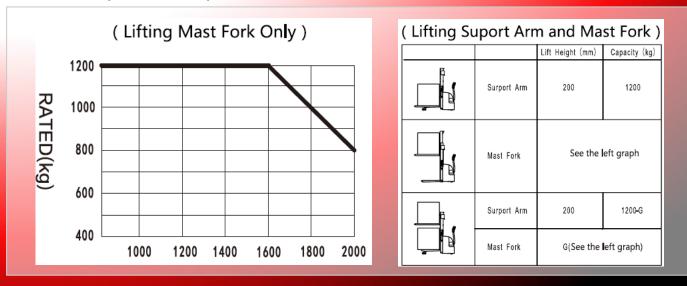

Units 10 & 11 Bridgwater Court, Oldmixon Crescent, Weston-super-Mare BS24 9AY Tel: +44 (0)1934 621777 Email: sales@howardhandling.co.uk Web: www.howardhandling.co.uk

