

Panther with Brake

- easy pallet transport


Optimum working conditions for the user – ergonomically correct handle and special wheels ensure a minimum starting power and correct handling of even very heavy pallets – both when pulling and pushing the trucks.

The Panther is available with a choice of parking footbrake or hand operated service brake. Panthers with service brakes are fitted with Vulkollan steer wheels.

No damage to surroundings, pallets and goods – Panther has an elegant design with rounded corners.

The design prevents industrial injuries and strain on the user – focus is put on safety and ergonomic working conditions of the user. The ergonomically correct shape of the handle ensures a relaxed hold for the user.

High quality is ensured through an extended test programme and in co-operation with experts in health & safety.

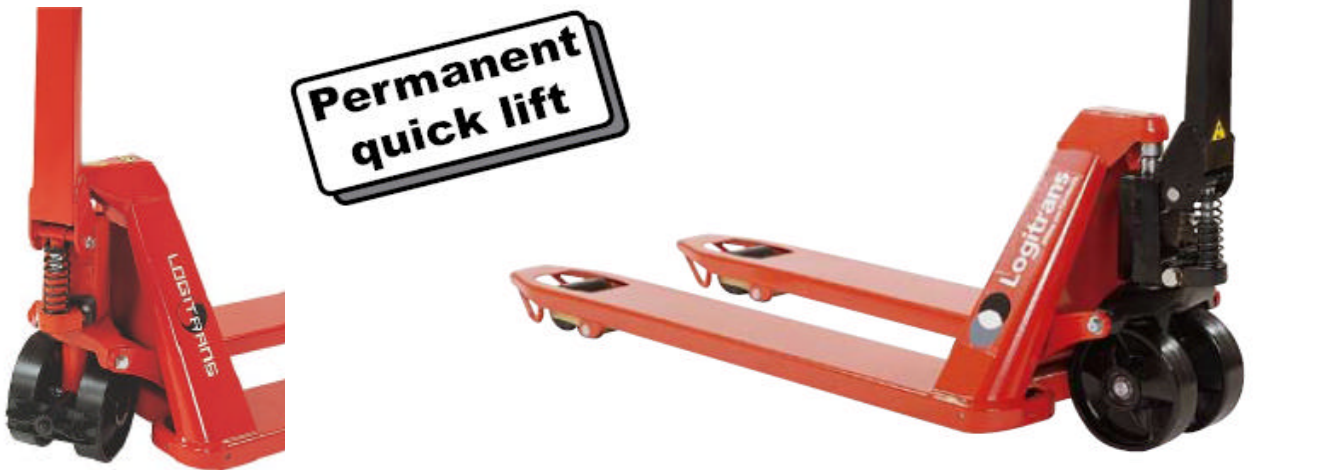

Parking Brake – foot operated



Vulkollan steer wheels on Service Brake

Technical Description

Panther is a strong and reliable pallet truck, ensuring easy handling of many different pallets.

Optimum manoeuvrability and space utilisation through

- very short length behind the forks
- low truck weight and tight turning angle

Long operating life and low maintenance costs through

- strong construction
- tests with up to 46,000 lifts

Silent transport through

- minimum friction of all movable parts
- close tolerances




Ergonomic handle ensures the user a relaxed hold. Can be marked with name/department.



The hoop skates on the forks ensure an easy fork insertion and withdrawal in/out of pallets



A company name or logo can be cut into the A-frame (optional extra)

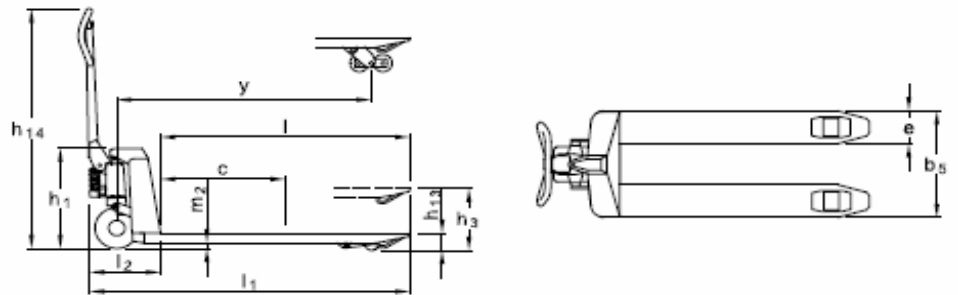

Adjustable fork height – no problems when handling low and worn pallets



Easy handling of goods is ensured even in very confined spaces

Product (measured in mm)	1671	1681	2571	2581	3071	3081
Capacity in kg	1600		2500		3000	
Lifting height	h_3		$h_{13} + 120$			
Fork length	600, 810, 970, 1140		600, 810, 915, 970, 1066, 1140, 1220, 1520, 1800, 2000, 2400*		600, 810, 915, 970, 1140, 1220, 1520	
Overall height	h_1		$h_{13} + 412$			
Fork span	450		520, 680		520, 680	
Length without forks	l_2		335			
Overall length	l_1		$l + 335$			
Fork width	e		125		160	
Wheelbase	y		$l + 25$			
Overall height	h_{14}		1170			
Lowered height - adjustable	h_{13}	75 to 83, 85 to 93	75 to 83	85 to 93	75 to 83	85 to 93
Load centre	c		$l / 2$			
Ground clearance	m_2		$h_{13} - 47$			
Turning angle of the wheels			220°			
Fork wheels - single	Ø75 x 68	Ø85 x 68	Ø75 x 90	Ø85 x 90		
Fork wheels - tandem			Ø75 x 68	Ø85 x 68	Ø75 x 68	Ø85 x 68
Steering wheel			Ø200 x 50			
Weight	60 kg (450 x 1140)		63 kg (520 x 1140)		69 kg (520 x 1140)	

* Reduced capacity 1500 kg



Permanent quick-lift



Service brake (hand operated) with Vulkollan steering wheels



Parking brake (foot operated)