## E-Truck Li-ion

# 1500kg









#### Small & compact, with low own weight & lithium-ion technology

Pull-out lithium ion battery, with fast recharge time of only 3 hours

Floating steel battery cartridge helps protect battery against weather conditions and impacts

Creep (turtle) speed for operation in very confined spaces

Low own weight of only 160kg, length behind forks of only 400mm


LCD battery display indicator and controls positioned for use with either hand

High quality programmable Curtis controller



## E-Truck Li-ion

# Specification

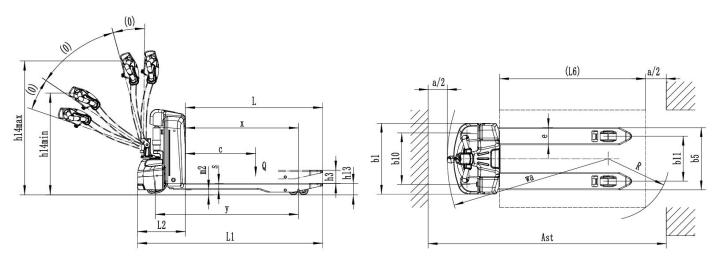

Load Capacity	kg	1500
Service Weight	kg	160
Fork Height, lowered	mm	80
Fork Height, raised	mm	195
Fork Dimensions (H x W x L)	mm	50 x 150 x 1150
Distance Between Fork Arms	mm	540
Load Centre Distance	mm	600
Overall Length	mm	1550
Overall Width	mm	610
Travel speed, laden/unladen	km/h	4.5/5
Lifting Speed, laden/unladen	m/s	0.028/0.031
Gradeability, laden/unladen	%	6/16
Battery Voltage/Rated Capacity	v/Ah	24/30
Charger	v/Ah	Internal 24/10
Drive Motor Rating (S2 60 min)	kW	0.75
Lift Motor Rating (S3 15%)	kW	0.8
Ground Clearance, centre of wheelbase	mm	30
Outer Turning Radius	mm	1330
Service Brake Type		Electric
Type of Drive Control		DC
Tyre Type driving wheels/loading wheels		PU
Sound Level at Driver's Ear	dB (A)	<74

