Loc E Series

E20 (2000kg)



Heavy duty power with custom bespoke options

Heavy duty Exide traction battery with long operating time per charge

Excellent French manufacturing reduces maintenance costs

Heavy duty steel battery casing

High quality Zapi speed controller enables setting of drive speed, acceleration etc


Creep (turtle) speed for use in tight spaces


Custom fork lengths, fork spans and other bespoke features available



_oc E20

Specification



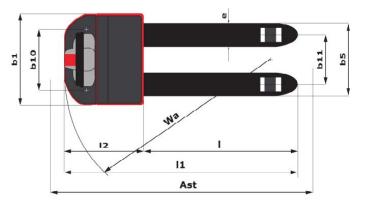

Max Capacity	kg	2000
Service Weight	kg	482
Fork Height, lowered	mm	85 (+/- 5mm)
Fork Height, raised	mm	210
Fork Dimensions (H \times W \times L)	mm	45 x 175 x 1150
Distance Between Fork Arms	mm	540
Load Centre Distance	mm	600
Overall Length	mm	1739
Length To Face Of Foks	mm	589
Travel speed, laden/unladen	km/h	5.8/6
Lifting Speed, laden/unladen	m/s	0.03/0.04
Lowering Speed, laden/unladen	m/s	0.05/0.03
Gradeability, laden/unladen	%	10/25
Battery Voltage/Rated Capacity	v/Ah	24/180
Turning Radius	mm	1544
Aisle Width for Pallet 800 x 1200 lengthways	mm	1939
Drive Motor Rating (S2 60 min)	kW	1.2
Lift Motor Rating (S3 15%)	kW	1
Ground Clearance, Centre of Wheelbase	mm	35
Service Brake/Parking Brake		Electromagnetic/Handle Release
Type of Drive Control		AC
Tyre Type driving wheels/loading wheels		Polyurethane
Sound Level at Driver's Ear	dB (A)	<65



Need help? <u>Contact Us</u>