

Wrap-over forks, bar forks and chisel forks

High flexibility and efficiency - the different Logitrans fork styles can easily carry and lift different pallets.

The forks can readily be fitted on all Logiflex models with an adjustable carriage. The forks can easily be exchanged with one of the many quick shift options, offered by Logitrans.

A wide range of optional extras ensures optimum utilisation of the Logiflex - the same Logiflex can be fitted with the quick shift products from Logitrans, such as boom, crane arm, platform, reel spindle, reel clamp and drum turner.

High quality is ensured through an extended test programme and in cooperation with experts in Health and Safety.



Technical Specifications

Wrap-over forks: Light forks for ordinary pallet handling.

Bar forks: Narrow forks for entry widths, narrower than those on a Euro-pallet.

Chisel forks: Thin forks for low heights under the load to be raised.



The forks can be fitted on all Logiflex models with and without straddle legs.




With the quick shift system, it is easy and quick to carry through exchange between forks and optional extras.




Quick shift options: Crane arm, boom, platform, reel spindle, reel clamp and drum turner.

Adjustable fork carriage for Logiflex stackers without straddle legs:

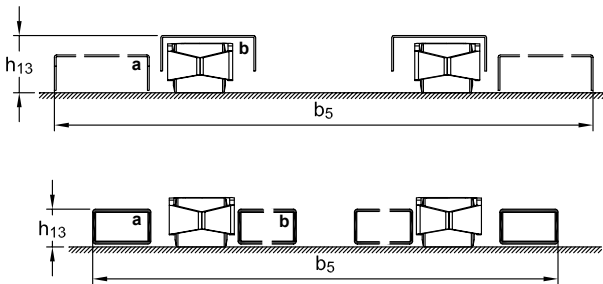

Adjustable fork carriage for Logiflex stackers with straddle legs:

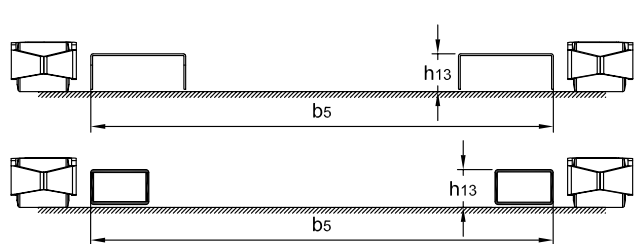

Product (measured in mm)	Fork carriage: 440 mm*			Fork carriage: 690 mm**		
	Wrap-over	Bar	Chisel	Wrap-over	Bar	Chisel
Fork style						
Size of wheel	Ø85			Ø85		
Fork span b_5	350-560	230-430	230-430	350-800	230-680	230-680
Fork span - a b_5						
Fork span - b b_5	560	230-300	230-300	560	230-300	230-300
Lowered fork height h_{13}	85	85	60	65	65	40
Lowered fork height - a h_{13}						
Lowered fork height - b h_{13}	85	85	60	65	65	40
Fork dimensions	163x61	100x60	100x35	163x61	100x60	100x35

Product (measured in mm)	Fork carriage: 810 mm***			Fork carriage: 946 mm		
	Wrap-over	Bar	Chisel	Wrap-over	Bar	Chisel
Fork style						
Size of wheel	Ø85			Ø85		
Fork span b_5	350-920	230-800	230-800	530-1050	420-930	420-930
Fork span - a b_5	876-920	750-800	750-800	876-1050	750-930	750-930
Fork span - b b_5	560	230-300	230-300	560		
Lowered fork height h_{13}	65	65	40	65	65	40
Lowered fork height - a h_{13}	65	65	40	65	65	40
Lowered fork height - b h_{13}	90	65	40			
Fork dimensions	163x61	100x60	100x35	163x61	100x60	100x35

* Standard carriage for LF MINI and ELF with capacity 1000 kg and lifting height 920 and 1650 mm.

** Standard carriage for Logiflex straddle stackers with wrap-over forks.

*** Standard carriage for Logiflex straddle stackers with bar and chisel forks.

Standard carriage for Logiflex stackers without straddle legs (but fork carriage 440 mm for LF MINI and ELF with capacity 1000 kg and lifting height 920 and 1650 mm).

We also offer tailor-made solutions.

Please ask for further information or visit our website www.logitrans.com