

Panther **- easy pallet transport**

Optimum working conditions for the user - ergonomically correct handle and special wheels ensure a minimum starting power and correct handling of even very heavy pallets - both when pulling and pushing the truck.

No damage to surroundings, pallets and goods - Panther has an elegant design with rounded corners.

The design prevents industrial injuries and strain on the user - focus is put on safety and ergonomic working conditions of the user. The ergonomically correct shape of the handle ensures a relaxed hold for the user.

High quality is ensured through an extended test programme and in cooperation with experts in Health and Safety.



**Permanent
quick lift**



Technical Specifications

Panther is a strong and reliable pallet truck, ensuring easy handling of many different pallets.

Optimum manoeuvrability and space utilisation through

- very short length behind the forks
- low truck weight and tight turning angle

Long operating life and low maintenance costs through

- strong construction
- tests with up to 46,000 lifts

Silent transport through

- minimum friction of all movable parts
- close tolerances

Stainless and explosion proof pallet trucks are also available.



Ergonomic handle ensures the user a relaxed hold. Can be marked with name/department.



The hoop skates on the forks ensure an easy fork insertion and withdrawal in/out of pallets.



The company name or logo can be cut out in the triangle of the Panther.




Adjustable fork height - no problems when handling low and worn pallets.



An easy handling of goods is ensured even in very confined spaces.

Product (measured in mm)	1671	1681	2571	2581	3071	3081
Capacity in kg	1600		2500		3000	
Lifting height	h_3		$h_{13} + 120$			
Fork length	600, 810, 970, 1140		600, 810, 915, 970, 1066, 1140, 1220, 1520, 1800, 2000, 2400*		600, 810, 915, 970, 1140, 1220, 1520	
Overall height	h_1					
Fork span	450		520, 680		520, 680	
Length without forks	l_2					
Overall length	l_1					
Fork width	125		160			
Wheelbase	y					
Overall height	h_{14}					
Lowered height - adjustable	h_{13}	75 to 83	85 to 93	75 to 83	85 to 93	75 to 83
Load centre	c					
Ground clearance	m_2					
Turning angle of the wheels	220°					
Fork wheels - single	$\varnothing 75 \times 68$	$\varnothing 85 \times 68$	$\varnothing 75 \times 90$	$\varnothing 85 \times 90$		
Fork wheels - tandem			$\varnothing 75 \times 68$	$\varnothing 85 \times 68$	$\varnothing 75 \times 68$	$\varnothing 85 \times 68$
Steering wheel	$\varnothing 200 \times 50$					
Weight	60 kg (450 x 1140)		63 kg (520 x 1140)		69 kg (520 x 1140)	

* Reduced capacity 1500 kg

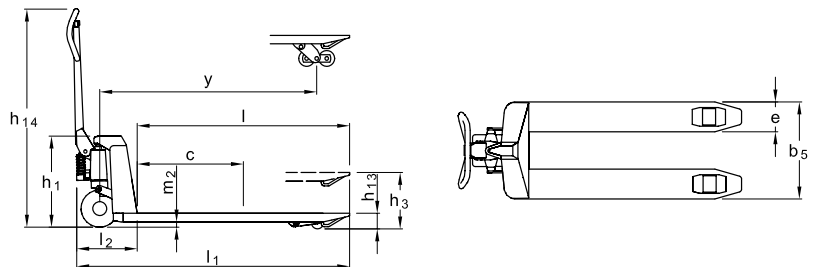

Permanent quick lift.



Different wheel types, to suit the needs of the user.



Panther is available with different fork lengths.

*We also offer tailor-made solutions.
Please ask for further information or visit our website*